


The pursuit of optimum sound is a passion at Krix. Designed using the highest quality components and detailed construction, Krix's floor standing speakers offer you an award winning high fidelity experience. This extensive range will suit supreme stereo listening or your ultimate home theatre set-up. For serious room-filling sound with smooth deep bass Krix's floor standing speakers are an experience you will want to enjoy everyday.

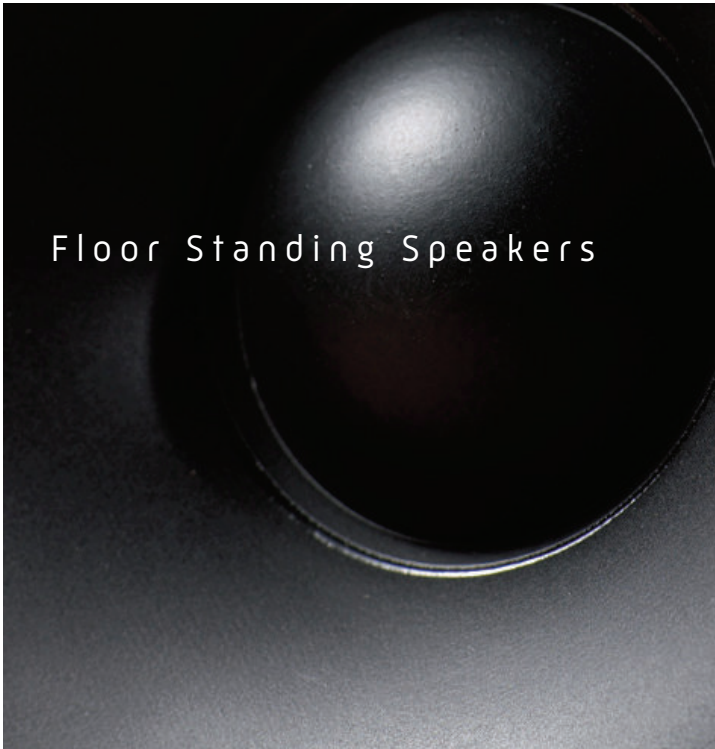

phoenix

involving big bass experience

The Phoenix have risen from the ashes of what was unquestionably Krix's most awarded and respected loudspeaker, the Lyrix / Lyrix Gold. Tonal depth, imaging and balanced musicality are highlights in this slim floorstanding design. Involve yourself in the experience of sound with the Phoenix.

"Commencing then with Pavarotti in the role of Lieutenant B. F. Pinkerton in Decca's 1974 recording of Madama Butterfly, the Phoenix gave tremendous body and depth to the tenor's voice. In the upper register, the 'King of the High C' himself sounded assured and grain free through the Krix tweeters. The overall sound was full and satisfying with lovely amounts of tight bass. With the Miles Davis recording 'Round About Midnight', the Krix were open and transparent when playing Miles' solos, yet bopped along with the rest of the band when the tempo picked up. The transparency could be put down to a couple of things, but I think it is the crossover which must take most of the credit here. I'm sure it was a process of careful listening and adjustment during the development phase." – Audio & Video Lifestyle – Australia

Frequency Range	35Hz - 20kHz in room response
Power Handling	Maximum 150 watts RMS amplifier power into 4 ohms
Sensitivity	90dB for 2.83 volts at 1 metre
Configuration	Point source dual 6 1/2 inch 2-way bi-wirable / bi-ampable.
Bass Drivers	Fibre reinforced moulded polymer baskets with 2 x nominal 165mm (6 1/2") doped paper cones. 25mm (1") vented magnet, voice coil wound on high powered aluminium former
Tweeter	28mm (1") doped fabric dome. Ferro fluid cooled. Double magnet shielded
Crossover Point	1.9kHz
Impedance	Nominally 4 ohms
Enclosure Type	Bass reflex, rear vented with internal/external flaring
Dimensions	935mm high x 205mm wide x 320mm deep
Material	17mm MDF, heavily braced
Finish	Vinyl or lacquered timber veneer
Volume	39 litres internal
Weight	19kg each

