




Designer Aesthetics  
Audiophile Performance  
Installation Ease

## PERFORMANCE LOUDSPEAKER SPECIFICATIONS SHEET

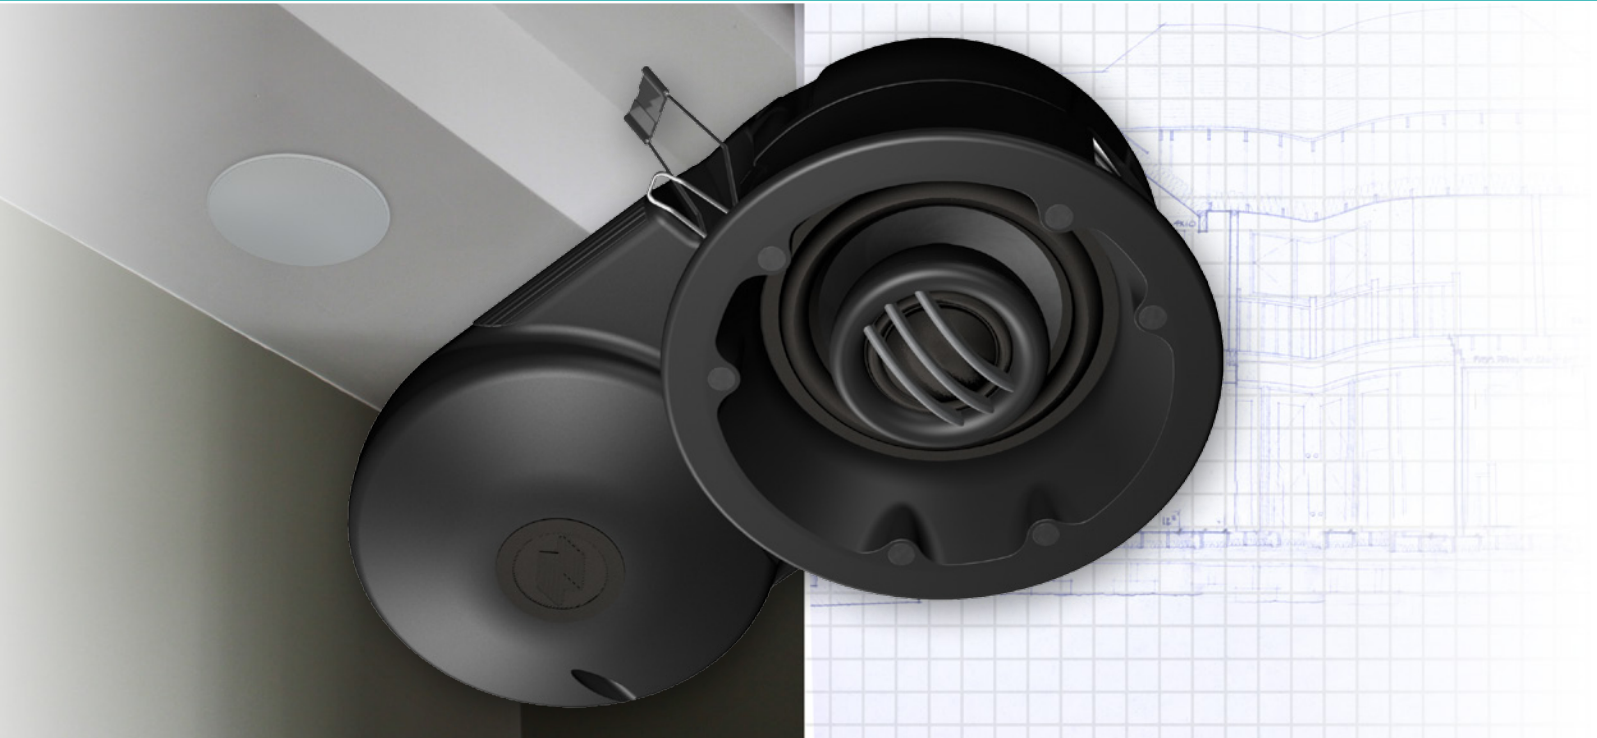

# CM4PR

4" 2-WAY CEILING-MOUNT  
PERFORMANCE LOUDSPEAKER



This compact ceiling mount loudspeaker features a rear wave control enclosure that inhibits sound transfer to adjacent rooms. It is ideal for locations with limited space and offers the ultimate in flexibility for installation locations.

### FEATURES AND BENEFITS

- **Designer Aesthetics** Magnetically attached MicroThin™ speaker grilles ensure a clean, virtually invisible appearance that blends with the room's aesthetics. Optional square grilles provide added design flexibility.
- **Superior Sound Quality** Precision tuned and voiced fixed woofer ceiling-mount loudspeakers provide graduated performance for all types of applications. Whether you are listening to background talk radio or a complete orchestra, Niles CM series delivers optimal performance and reliability.
- **Installation Ease** Tri-mount clips makes installation a snap, when installing in existing walls and surfaces. The unique shape of the rear wave enclosure fits easily through the mounting hole and has a depth of only 3 5/16" beyond standard 5/8" drywall.
- **Install With Confidence** The best-built loudspeakers deserve the best protection—the Niles Lifetime Limited Warranty.

## 2-WAY CEILING-MOUNT LOUDSPEAKERS

### CM4PR

#### 3.5" 2-Way Ceiling-Mount Performance Loudspeaker

For smaller spaces or wherever preventing sound bleed-through to other spaces is critical



Packaged Individually with Round MicroThin™ Grille

Stock Number

FG01666

#### FEATURES

- Custom Rear Wave Enclosure enhances acoustic performance while limiting sound from bleeding through to adjacent spaces
- Mineral-Filled Polypropylene cone is extremely rigid to reduce breakup, lower distortion and provide enhanced bass response
- Butyl rubber surround damps resonance and provides exceptional durability
- 1" fluid-cooled Teteron® dome tweeter offers ultra-wide dispersion and silky-smooth high-frequency response
- Easy to Use Tri-mount clips provide for quick installation
- Magnetically attached, rust-resistant grille covers install quickly and provide a low profile look
- Weather resistant construction reduces installation limitations and provides unique solutions in moist environments or outdoors under eaves



#### SPECIFICATIONS

- Frequency Response: 70Hz to 21kHz +/-3dB
- Impedance: 8 ohm nominal; 6 ohm minimum
- Recommended Amplifier Power: 25 to 100 Watts
- Hole Cutout: 4-5/8" (11.75 cm)
- Depth behind ceiling (5/8" drywall): 3 5/16" (8.4 cm)
- Shipping Weight: 2.7 lbs (1.2 kg)




**WARRANTY:** Lifetime Limited

#### RELATED PRODUCTS

|   |   |
|---|---|
|  | <p><b>SG4C</b><br/>4" Square Loudspeaker Grille<br/>Stock Number: FG01674</p> |
|  | <p><b>NCB4C</b><br/>4" New Construction Bracket<br/>Stock Number: FG01673</p> |



BLENDING HIGH FIDELITY AND ARCHITECTURE®

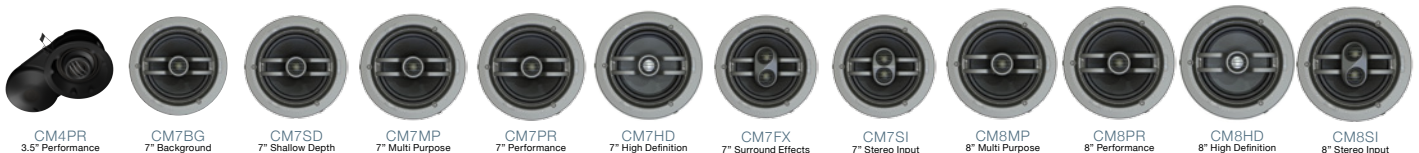

CM4PR  
3.5" Performance

CM7BG  
7" Background

CM7SD  
7" Shallow Depth

CM7MP  
7" Multi Purpose

CM7PR  
7" Performance

CM7HD  
7" High Definition

CM7FX  
7" Surround Effects

CM7SI  
7" Stereo Input

CM8MP  
8" Multi Purpose

CM8PR  
8" Performance

CM8HD  
8" High Definition

CM8SI  
8" Stereo Input

1-800-BUY-HIFI - [www.nilesaudio.com](http://www.nilesaudio.com)

©2011 The AVC Group, LLC. All Rights Reserved. Niles, the Niles logo and Blending High Fidelity and Architecture are registered trademarks of The AVC Group, LLC. MicroThin is a trademark of The AVC Group, LLC. All other trademarks are the property of their respective owners. We reserve the right to change features, descriptions, and/or specifications at any time without notice. CS0329A